
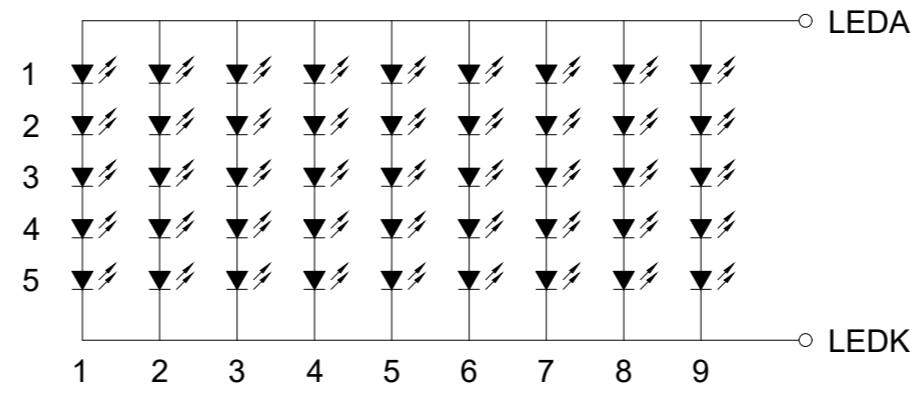


Revision:	Changes:	Date:
1.0	Initial Case	2023.08.28

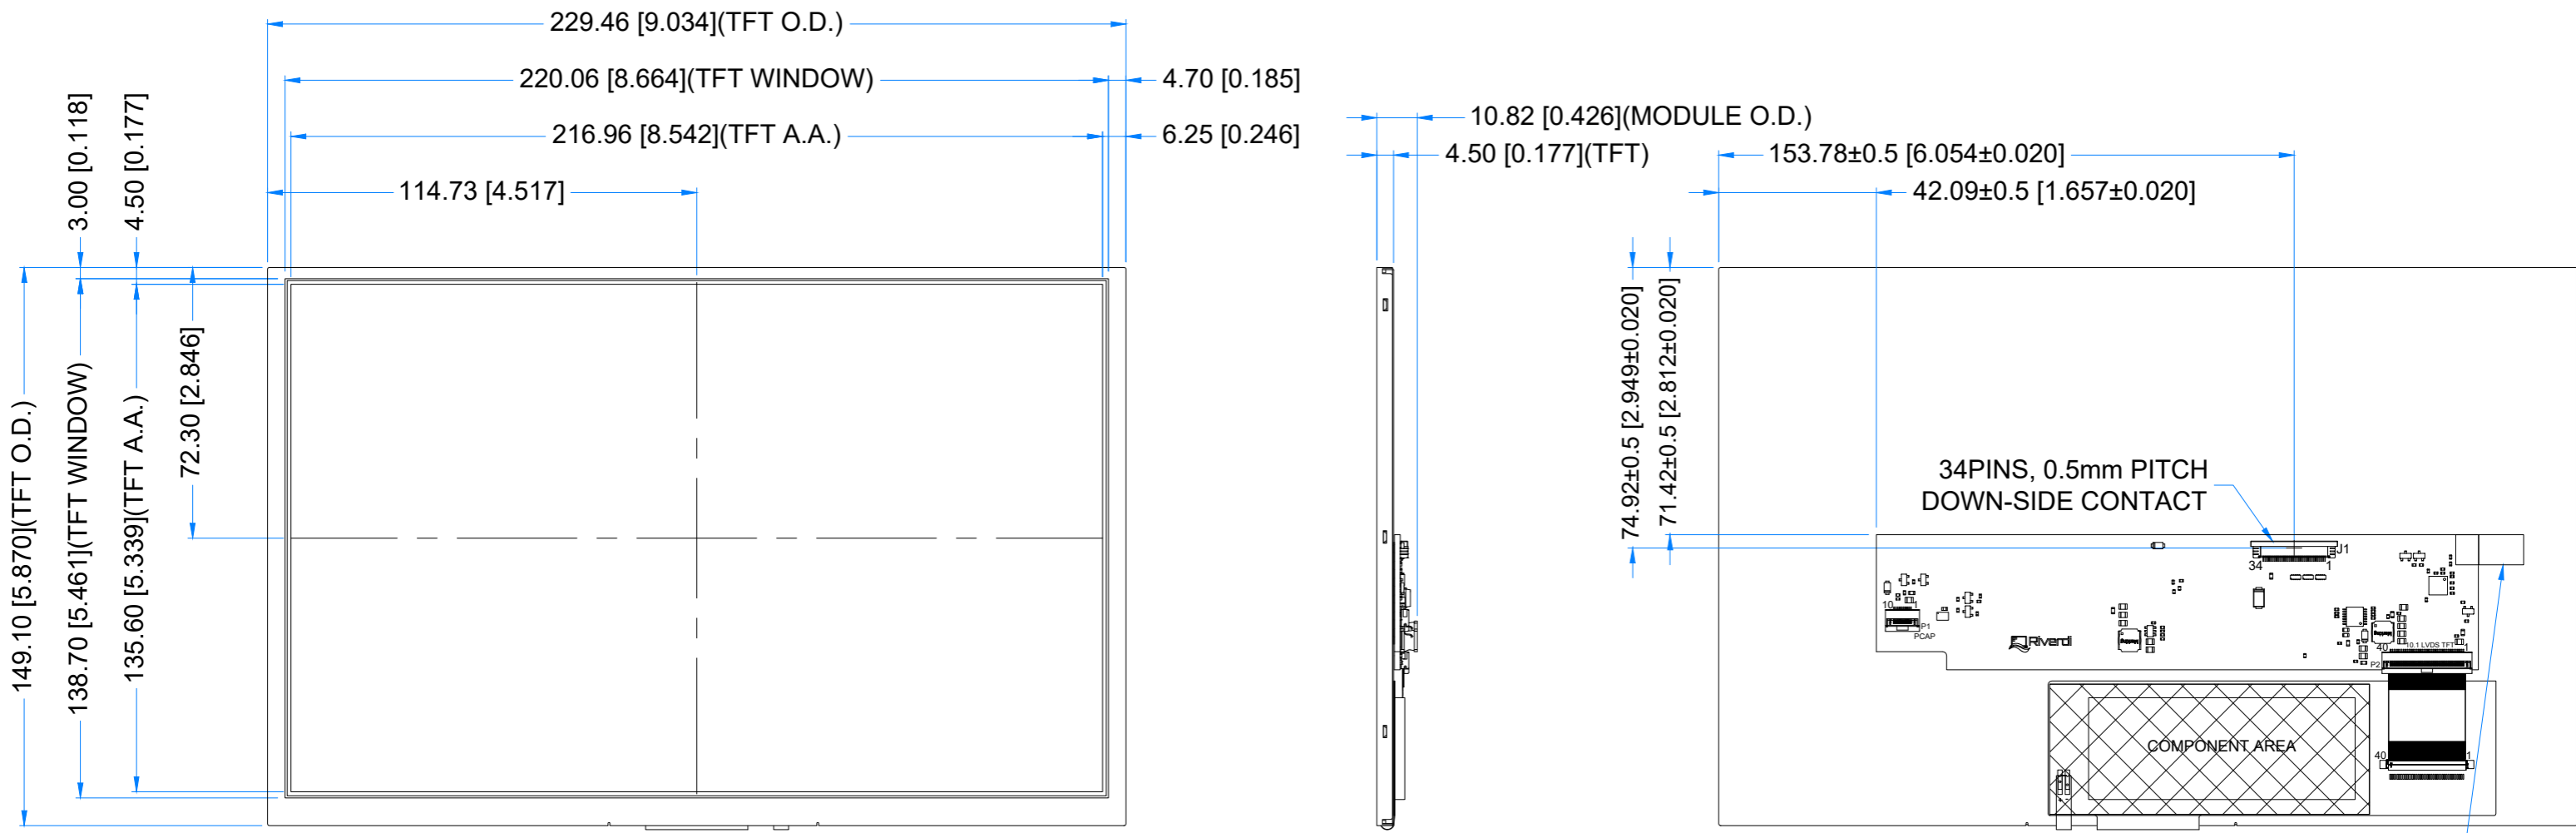

LED Diagram Circuit

PINOUT ON THE 2ND PAGE

LCD NOTES:
 1. LCD TYPE: TRANSMISSIVE, NORMALLY BLACK, IPS
 2. RESOLUTION: 1280x800
 3. VIEWING ANGLE: FREE
 4. SURFACE LUMINANCE: 1000 cd/m²
 5. DRIVING IC ON THE BOARD: SN65DSI83ZXHR
 6. INTERFACE: MIPI DSI
 7. SUPPLY VOLTAGE FOR MODULE: 5.0 V

GENERAL NOTES:
 1. P1 IS AN UNUSED PCAP CONNECTOR ON THIS MODULE
 2. ZERO BAD PIXELS FOR TFT
 3. OPERATING TEMPERATURE: -20°C ~ 70°C
 4. STORAGE TEMPERATURE: -30°C ~ 80°C
 5. WITHOUT INDIVIDUAL TOLERANCE: ±0.3mm[0.012inch]
 6. RoHS COMPLIANT

PN: RVT101HVDNWN00
 SN:
 DRAWN: M.Natywa
 CHECKED: Carol Gao
 APPR:

2023.08.28	1:1.68	
2023.09.04	[mm]	
	ISO A3	

P. 1 of 1